


## DESCRIPTION

EI GATE-Dostec AC allows to monitor real-time parameters such as flow rate, motor speed, pulse and sensor inputs, etc. It also allows to receive sms and emails alarms, configurable through the platform.

## GENERAL COMMUNICATION SCHEMA

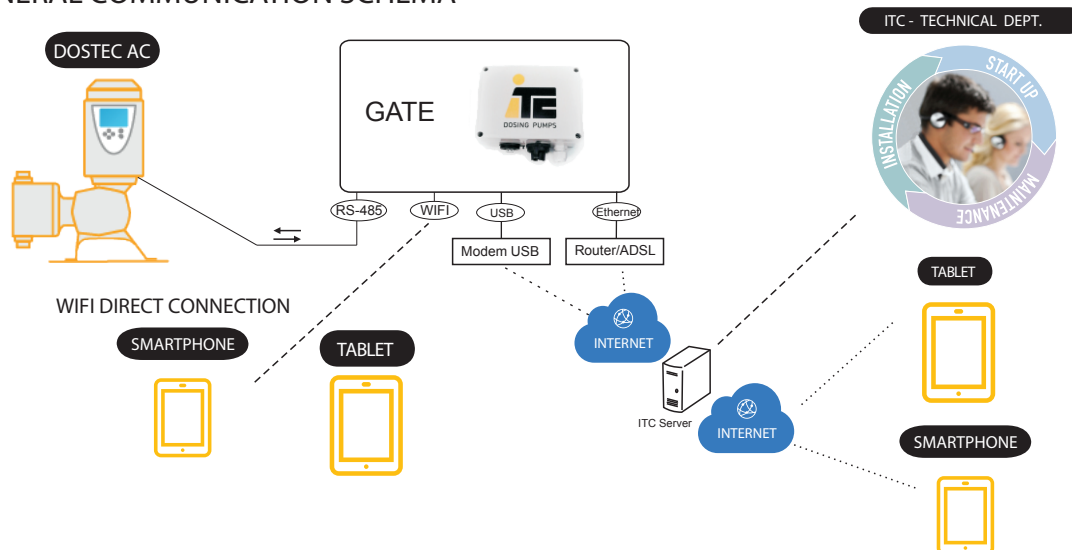

## TECHNICAL FEATURES

Supply voltage: 85-264Vac, 50/60Hz  
 Power: 6W  
 Temperature: 0-45°C  
 Relative humidity: 0-95% no condensation  
 Dimensions: 160x80x90mm  
 Conectivity:  
 Ethernet, ADSL connection, router 3G.  
 Modem USB, accesory for good telephonic reception without outdoors antenna  
 Wifi, for a direct connection using a tablet or smartphone.  
 Connections:


wifi:	- A B	-	- +	- +		L	N
password:webscada	RS	IN	dry	OUT	IN	100-240	
http://1.2.3.4:7777	485	contact		12Vdc		Vac	

Ref.: 01-004



## ACCESORIES

- 40653 Modem USB 3G
- 01-015 Router 3G with indoors antenna and 1m ethernet cable IP 68
- 01-013 1m ethernet cable IP 68
- 01636 Outdoors antenna with 5m cable

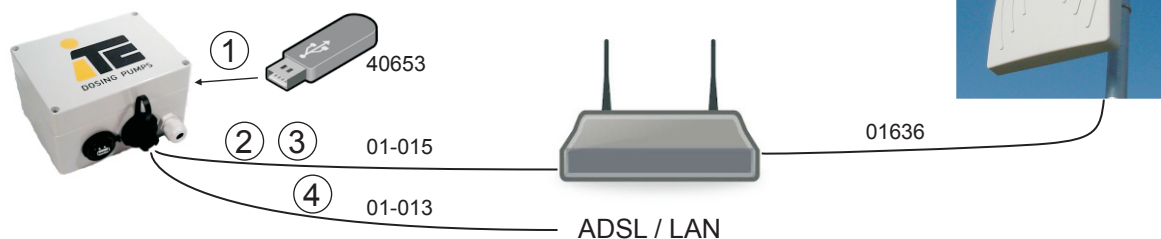


## OPTIONS:

- 1.- GATE(01-001)+ modem USB(40653), for good reception.
- 2.- GATE(01-001)+ Router 3G (01-015), for medium reception.
- 3.- GATE(01-001)+ Router 3G (01-015) + outdoors antenna (01636), for poor reception.
- 4.- GATE(01-001)+ ethernet cable (01-013), to connect at the customer LAN.



FUNCTIONALITIES:

Mobile application to manage easily the smart dosing pump Dostec AC.

CONECTIVITY

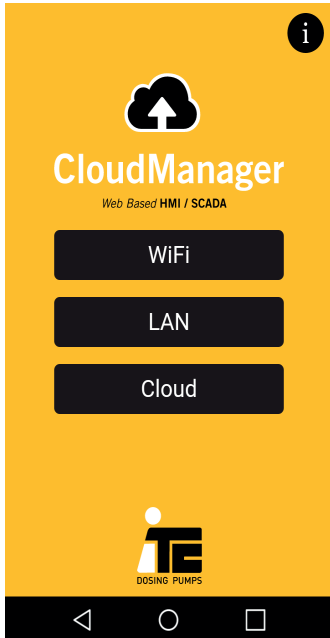

CONTROL PANEL

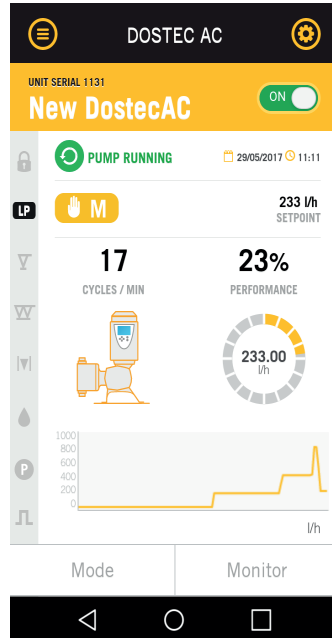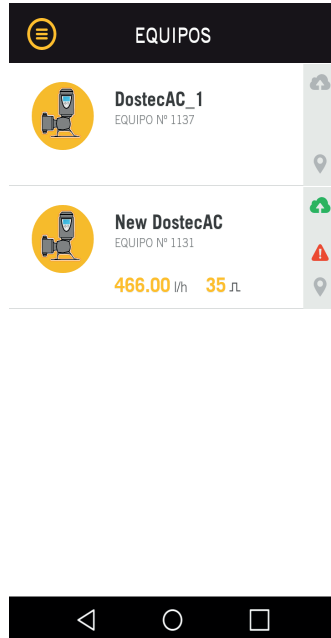

Configuration

Start/Stop



Pump state

Dosing Mode

Real time flow dosed

Graphics

ALARMS CONFIGURATION, SET UP MENU.

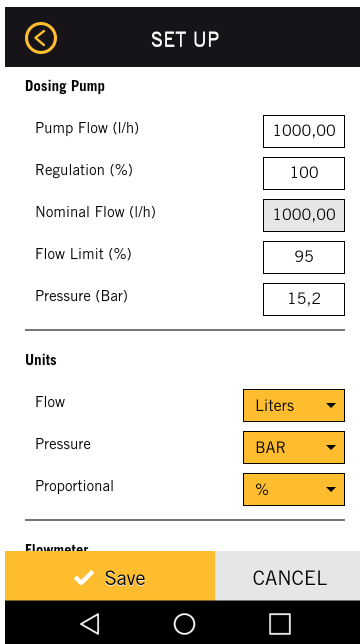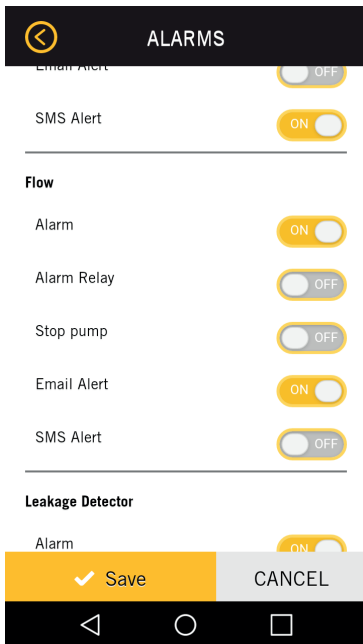

REAL TIME PARAMETERS OF DOSTEC AC

